

PHZ-300



DOWNLOAD



Catalog



2D



3D

SAVE TO PDF / PRINT

PUBLICATION - 2017-11-07

NOMINAL OPERATION PARAMETERS AT PURE WATER PUMPING (for the maximum rotation speed and the largest rotor)

| | | | |
|---------------------------------|-------|------|---------|
| Capacity | Q_n | 1400 | m^3/h |
| Head | H | 73 | m |
| Rotational speed | n | 980* | rpm |
| Impeller diameter | D_z | 725* | mm |
| Shaft power | P_n | 357 | kW |
| Weight | m | 2646 | kg |
| Max. permissible size of solids | | 50 | mm |

*Pump construction enables decreasing the operational parameters by reducing the rotation speed and/or reducing the rotor's diameter, adapting the pump to the system without choking the pump.

TYPICAL APPLICATIONS

- pumping mixtures of water and solids, with large grains and highly abrasive properties,
 - pumping mixtures of water and quartz sand, ores, coal, slag, ash,
 - mining - PHZ pumps intended to replace hydrotransport drainage pumps used so far,
 - water supply systems,
 - pressure boosting,
 - technological processes,
 - industrial systems,
 - filtration systems.
-


KEY ADVANTAGES

- long life ensured by the use of state-of-the-art corrosion and erosion resistant materials,
- possibility of operation with a frequency converter,
- possibility of serial operation,
- the pumped mixture density can reach $\rho_{\max} = 1700\text{kg/m}^3$ while pumping mixtures with a 50% content of solids in water,
- silent and smooth operation,
- connection dimensions in compliance with hydrotransport pumps,
- inflow and suction operation,
- approved for operation in explosion-hazard zones - ATEX Ex I M2.


PUMP PERFORMANCE CURVE

IN PROGRESS

MAIN DIMENSIONS OF PUMP

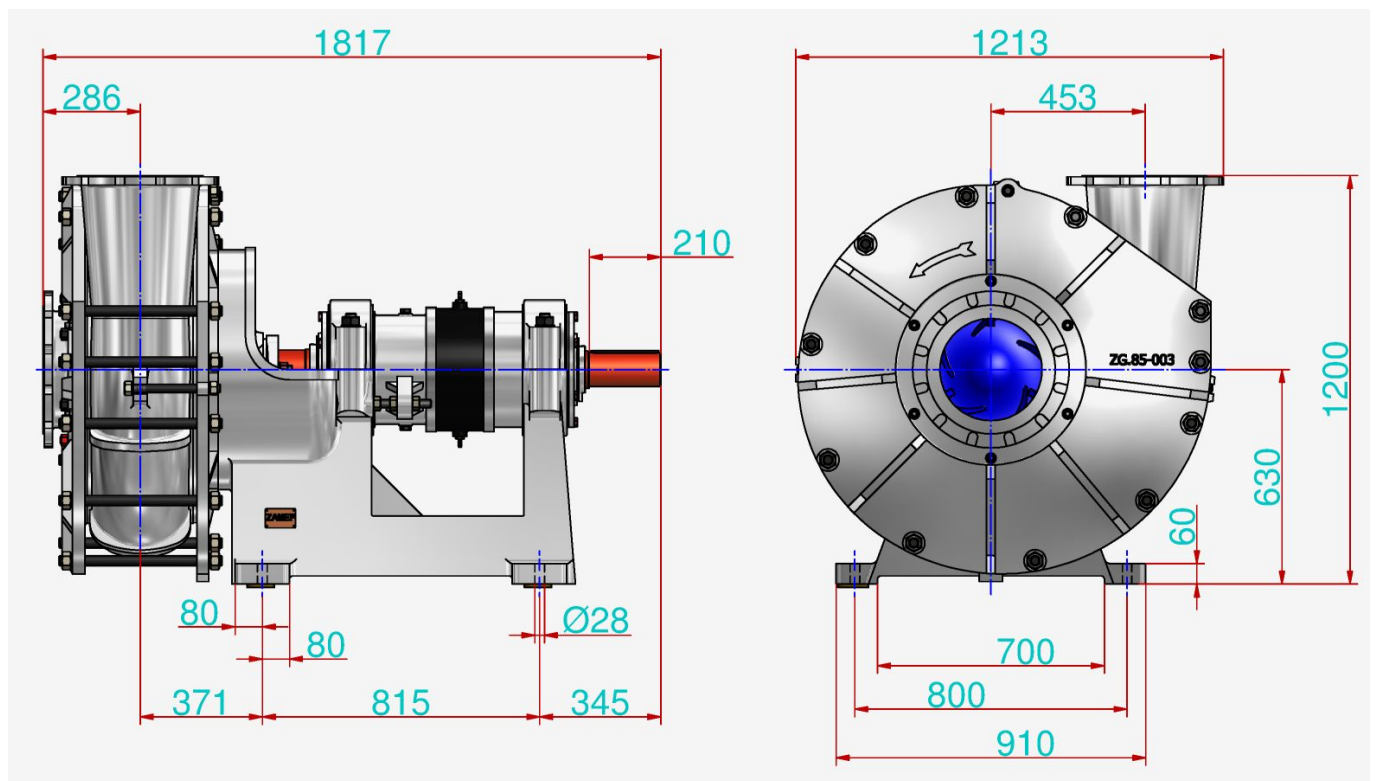


CONNECTION SIZES OF PUMP

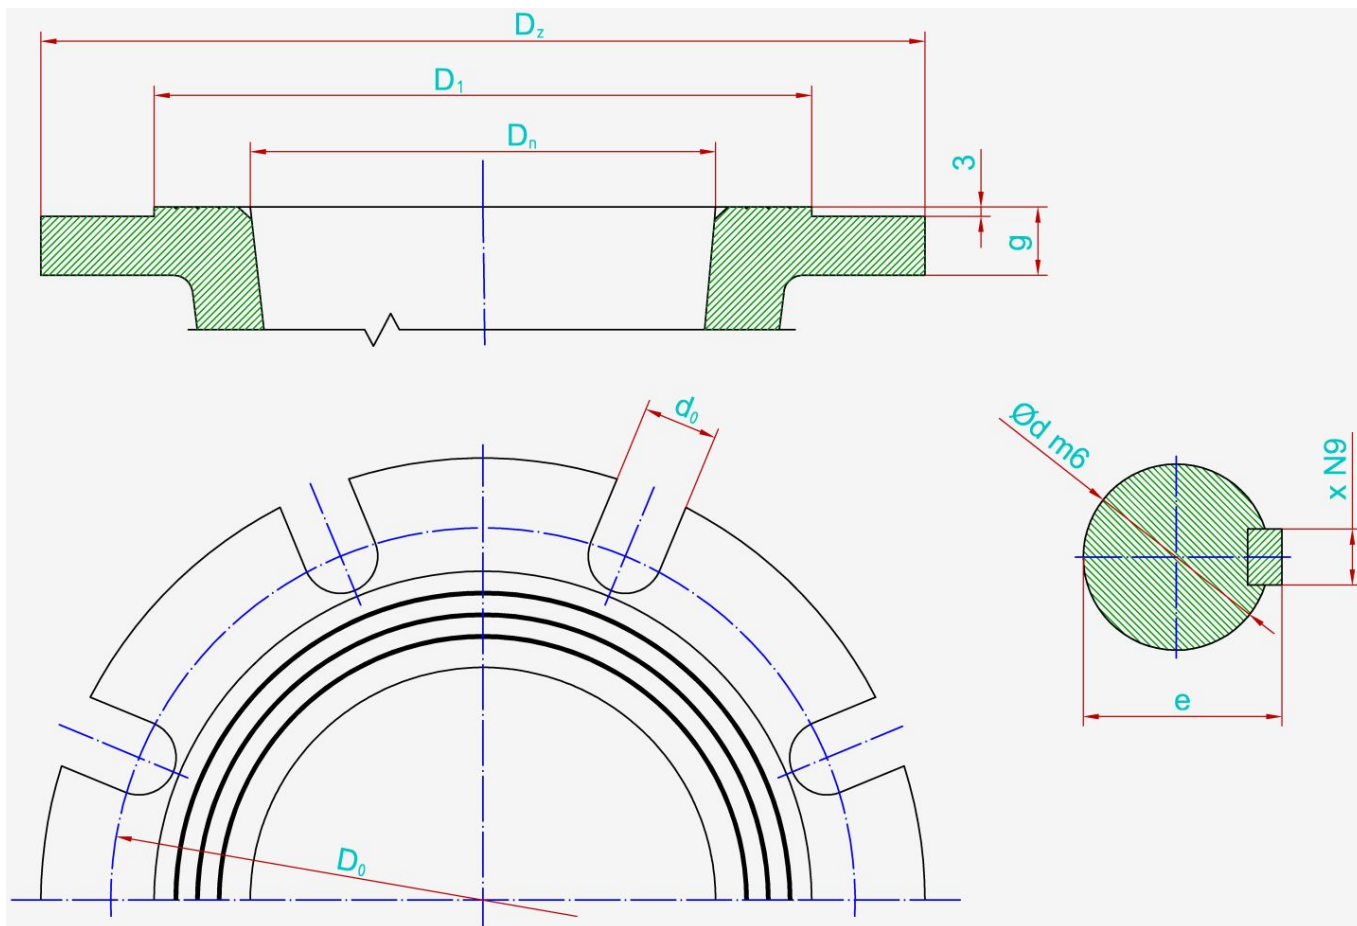

| | P_n | D_n | i | D_z | d_0 | g | D_0 | D_1 | d | e | x |
|---------------------|-------|-------|-----|-------|-------|-----|-------|-------|-----|-----|-----|
| Suction connector | 16 | 300 | 12 | 460 | 28 | 26 | 410 | 378 | - | - | - |
| Discharge connector | - | - | - | - | - | - | - | - | 100 | 106 | 28 |
| Shaft / coupling | bar | mm | - | mm | mm | mm | mm | mm | mm | mm | mm |

The flanges are normally made in accordance with the standard PN-EN 1092-1 or PN-EN 1092-2.

MAIN DIMENSIONS OF PUMP UNIT

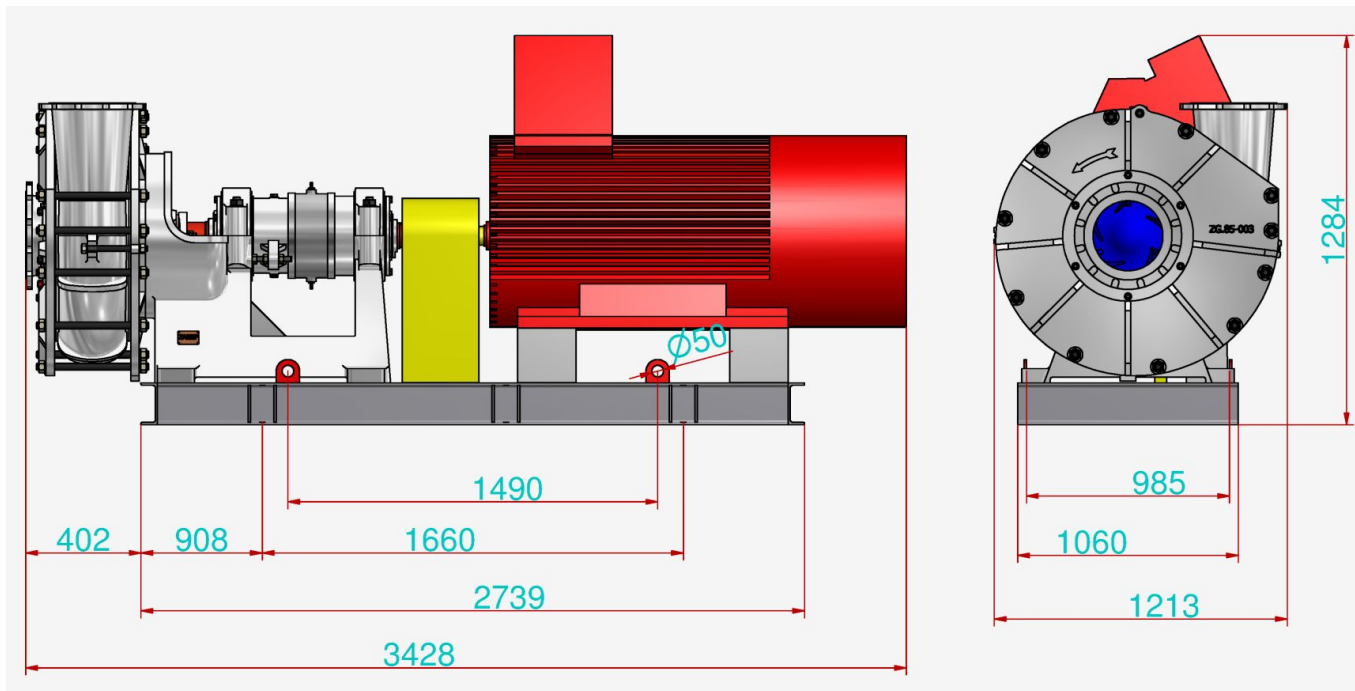

| | | |
|---------------|-------------------|----|
| Motor type | Damel 2SG3 450S-4 | - |
| Coupling type | V425 | - |
| Weight | 5256 | kg |

It is possible to produce pumps with parameters different than those presented in the tables and on the graphs per agreement with the manufacturer.