


SPW-150



DOWNLOAD

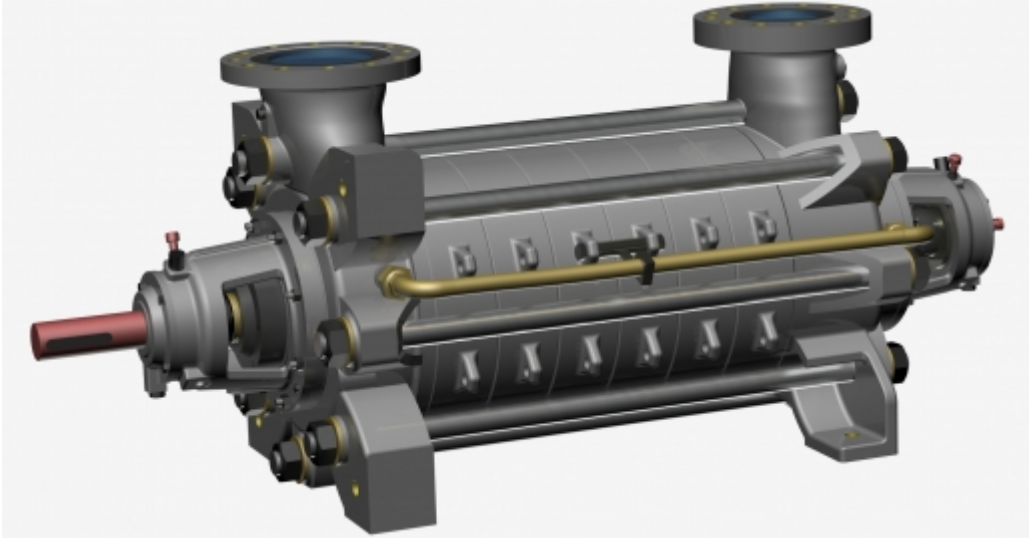

Catalog



2D



3D

SAVE TO PDF / PRINT

PUBLICATION - 2017-11-07

TYPICAL APPLICATIONS


- pumping of pure or mechanically contaminated water with solids with the grain size of up to 2 mm,
- pressure boosting,

- technological processes,
 - industrial systems,
 - mining - main and auxiliary dewatering.
-

KEY ADVANTAGES

- long life ensured by the use of state-of-the-art corrosion- and erosion resistant materials,
 - special material execution DUPLEX especially resistant to difficult conditions,
 - precise balancing of rotating unit,
 - the highest precision of parts workmanship with the use of multi-axle machinery,
 - possibility of changing the suction connection every 90,
 - possibility of using a mechanical seal,
 - possibility to use an electronic system of the balance disk wear monitoring,
 - approved for operation in explosion-hazard zones - ATEX Ex I M2.
-


PUMP PERFORMANCE CURVE

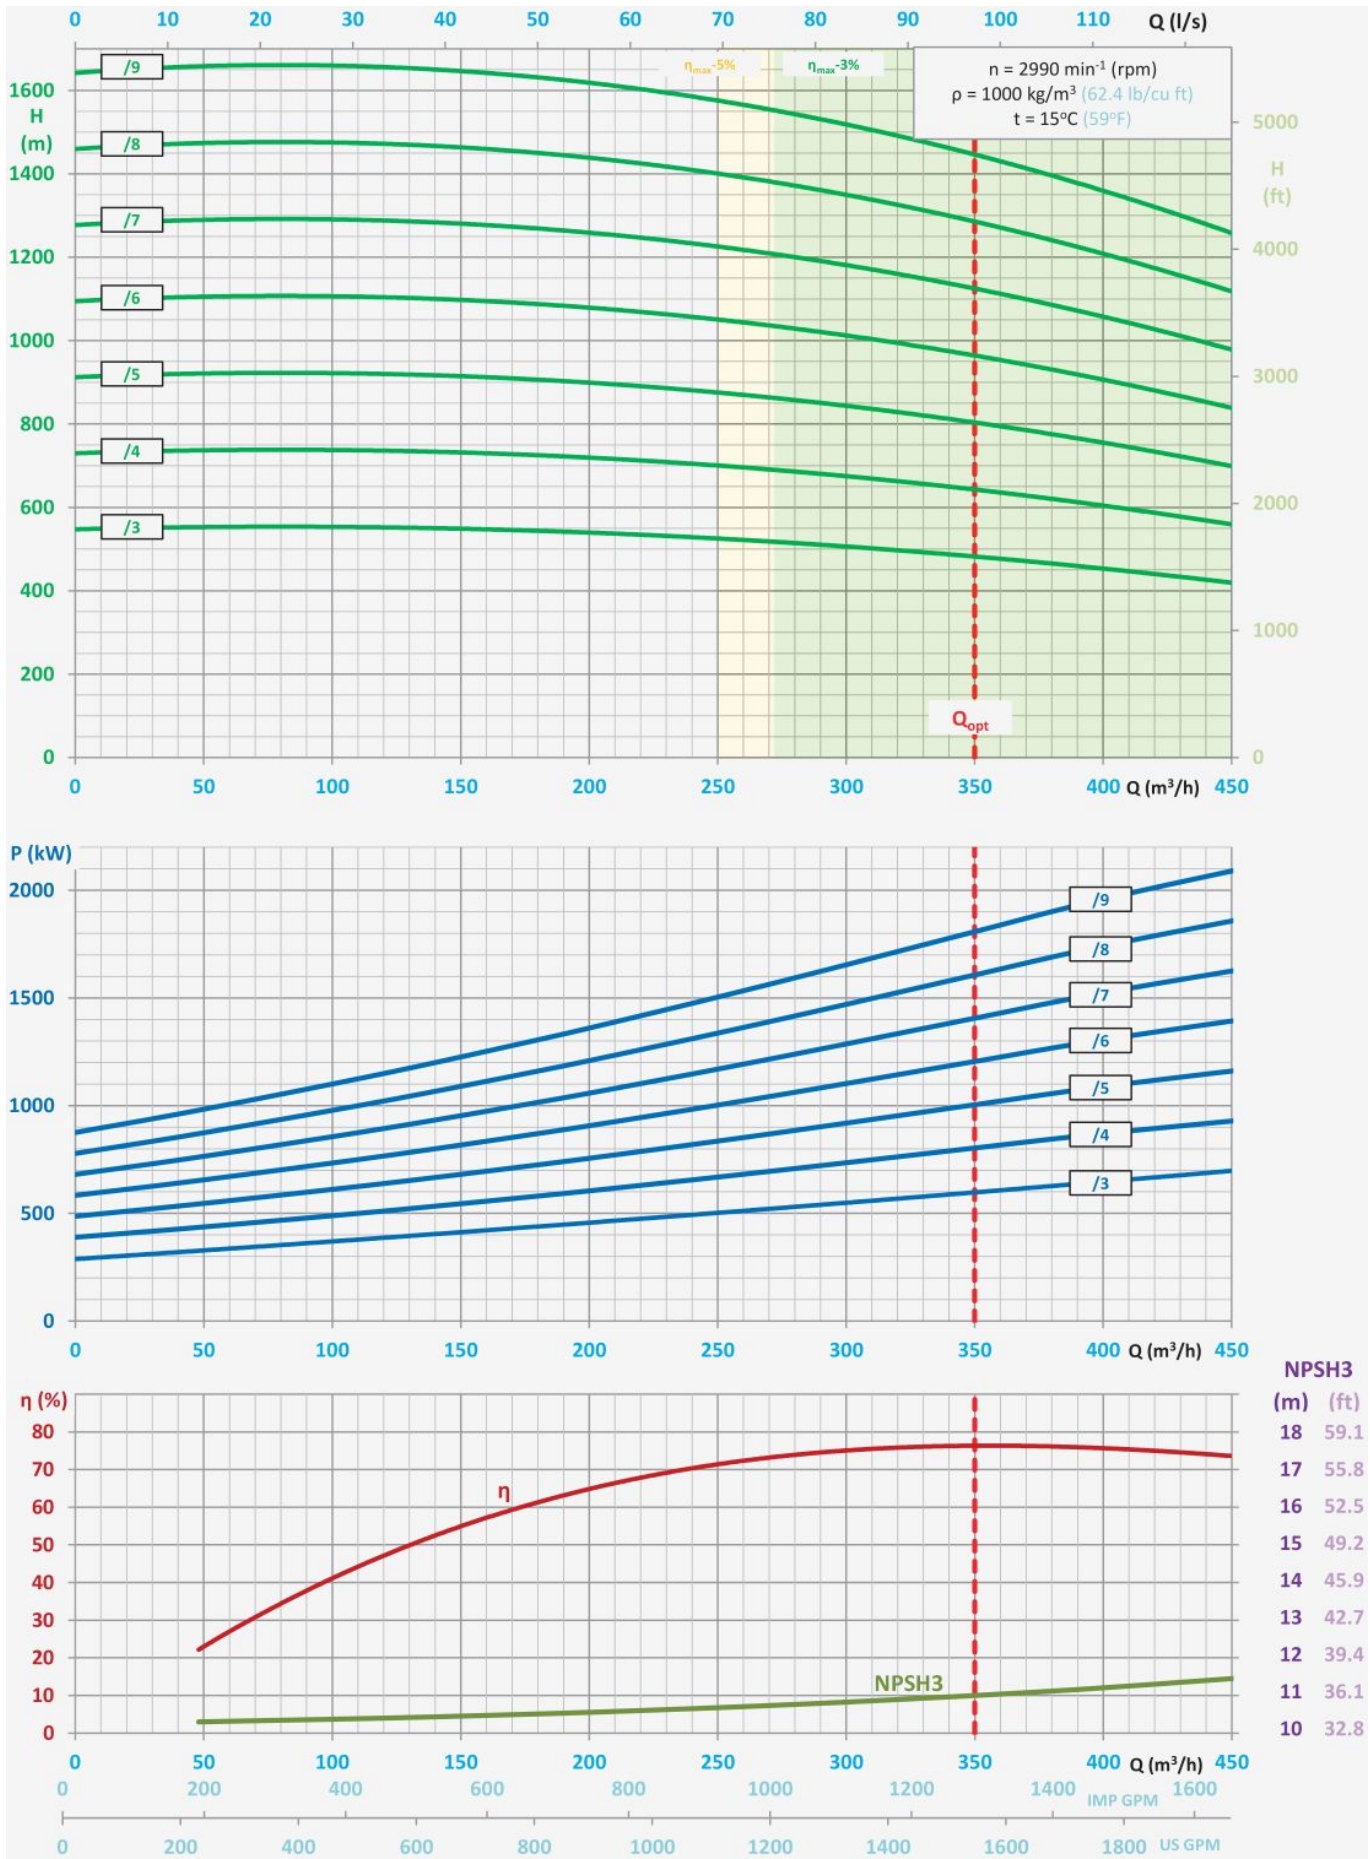

- $H = f(Q)$ - lift head acc. to rate flow,


- $P = f(Q)$ - power input acc. to rate flow,
- $\eta = f(Q)$ - efficiency acc. to rate of flow,
- $NPSH_3 = f(Q)$ - net positive suction head and rate of flow.

MAIN DIMENSIONS OF PUMP

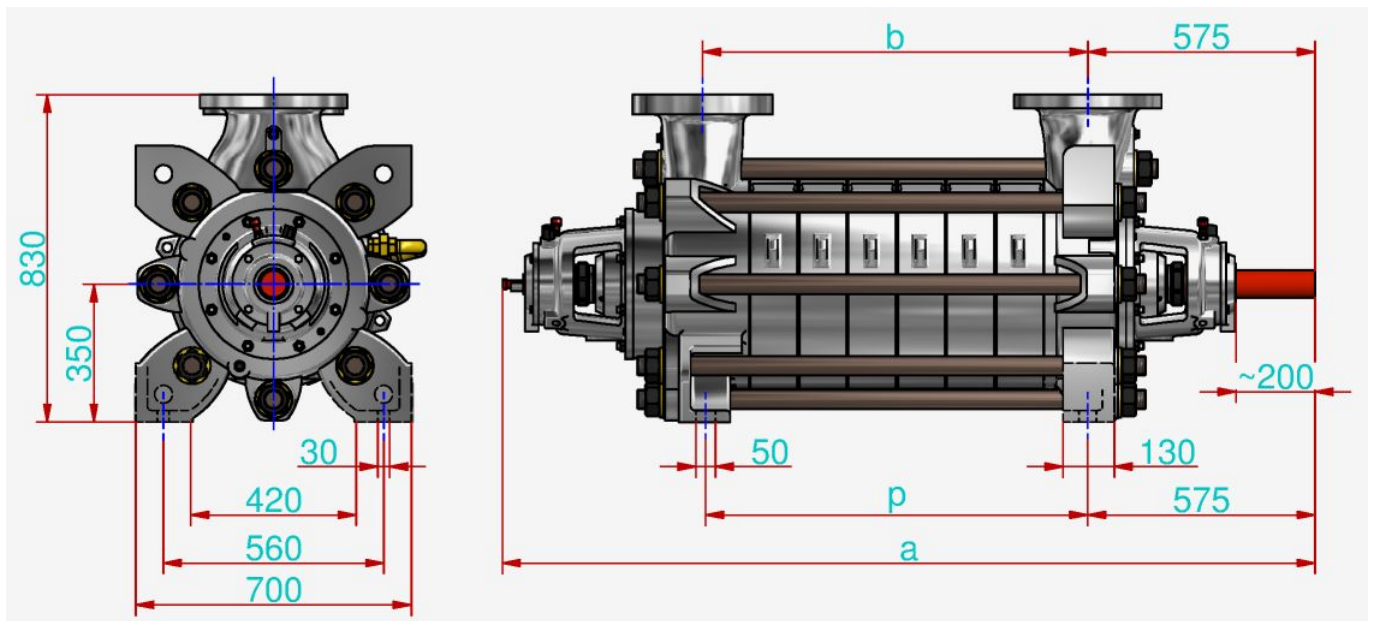

	Number of stages								
	3	4	5	6	7	8	9		
a	1600	1725	1850	1975	2100	2225	2350	mm	
b	475	600	725	850	975	1100	1225	mm	
p	475	600	725	850	975	1100	1225	mm	

CONNECTION SIZES OF PUMP

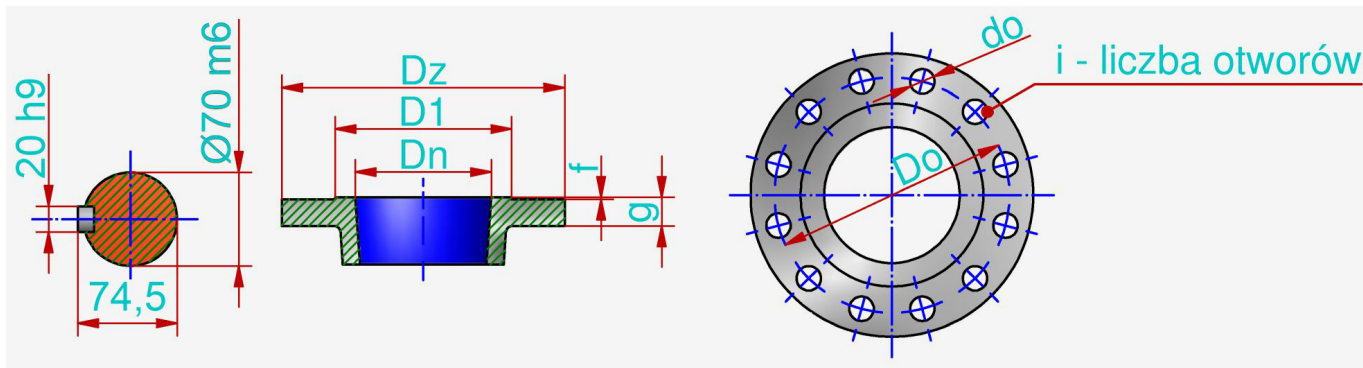

	D_n	Number of stages	P_n	D_z	d_0	g	f	D_0	D_1	i
Suction connector	200	-	10	340	22	24	3	295	268	8
			40	375	30	34	3	320	268	12
Discharge connector	150	3 4÷6 7÷9	63	345	33	44	4	280	203	8
			100	355	33	44	4	290	203	12
			160	355	33	44	4	290	210	12
	mm	-	bar	mm	mm	mm	mm	mm	mm	-

The flanges are normally made in accordance with the standard PN-EN 1092-1 or PN-EN 1092-2.

It is possible to produce pumps with parameters different than those presented in the tables and on the graphs per agreement with the manufacturer.