


Previous - WPWE-200



MATERIAŁY DO POBRANIA

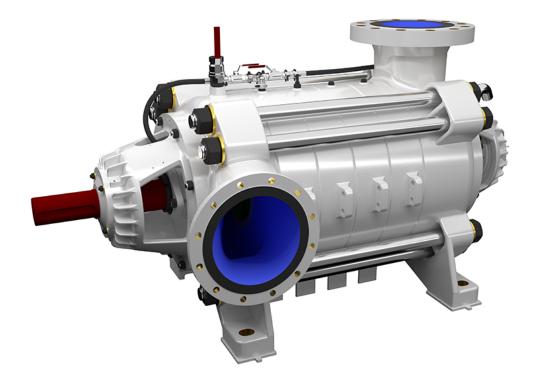

Katalog





ZAPISZ DO PDF / DRUKUJ STRONĘ

DATA PUBLIKACJI - 2024-07-25


TYPICAL APPLICATIONS

- mining main and auxiliary dewatering,
- industrial systems,
- technological processes,
- pressure boosting,
- pumping of pure or mechanically contaminated water with solids with the grain size of up to 2 mm,
- coal, copper, salt mines and others.

KEY ADVANTAGES

- new improved design with increased efficiency
- long life ensured by the use of state-of-the-art corrosion and erosion resistant materials (saltresistant workmanship),
- special material execution DUPLEX especially resistant to difficult conditions,
- possibility to use an electronic system of the balance disk wear monitoring,
- approved for operation in explosion-hazard zones ATEX Ex I M2.


PUMP PERFORMANCE CURVE

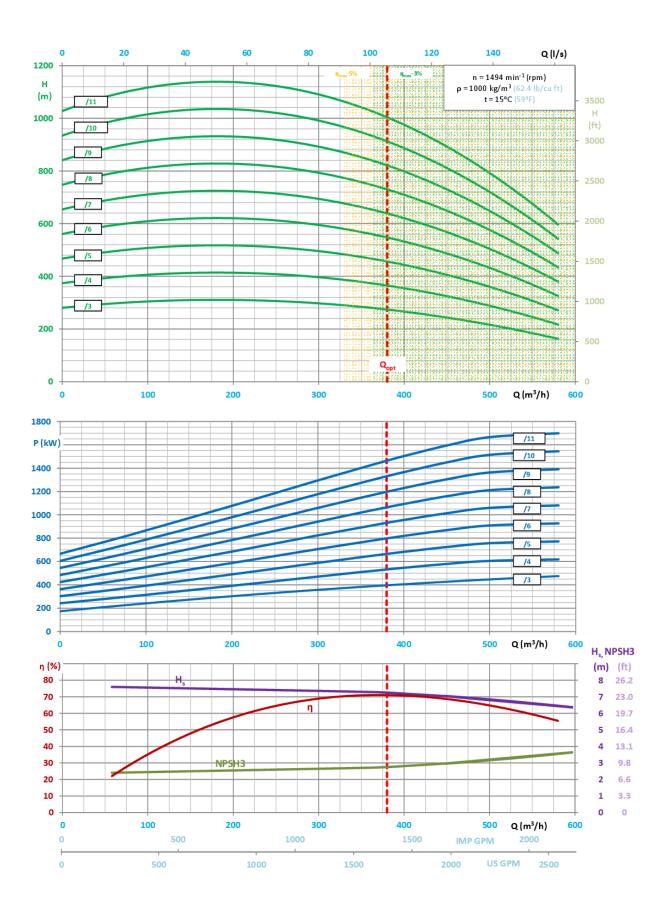

• H = f(Q) – lift head acc. to rate flow,


- P = f(Q) power input acc. to rate flow,
- $\eta = f(Q)$ efficiency acc. to rate of flow,
- $H_s = f(Q)$ allowable suction head acc. to rate of flow,
- NPSH3 = f(Q) net positive suction head and rate of flow.


MAIN DIMENSIONS OF PUMP

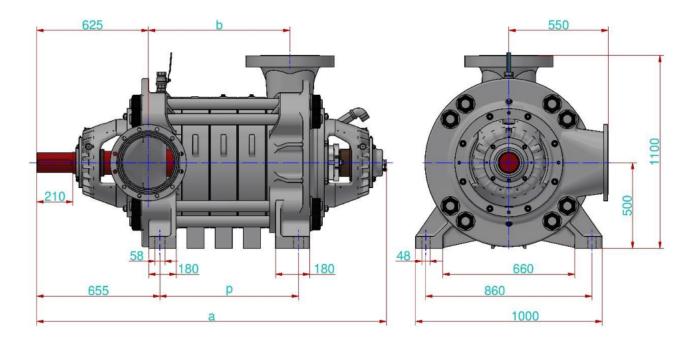

		Liczba stopni										
		3	4	5	6	7	8	9	10	11		
WE-200	a	1755	1890	2025	2160	2295	2430	2565	2700	2835		
	b	575	710	845	980	1115	1250	1385	1520	1655		
	p	590	725	860	995	1130	1265	1400	1535	1670		

CONNECTION SIZES OF PUMP

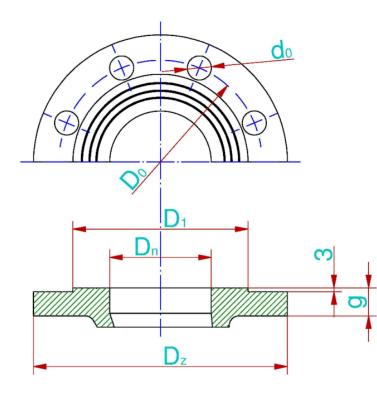

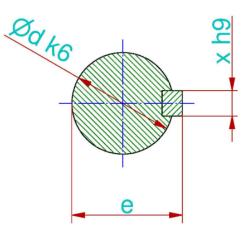

	Króćce									Wał			
	ilość	Dn	Pn	Dz	do	g	f	Do	D1	i	d	e	x
	stopni	[mm]	[bar]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[szt]	[mm]	[mm]	[mm]
WE-200													
Ssawny	-	250	10	395	22	26	3	350	320	12			32
	36	200	63	415	36	42	3	345	259	12	115 1	122	
Tłoczny	79	200	100	430	36	52	3	360	259	12			
	1011	200	160	430	36	60	3	360	259	12			

The flanges are normally made in accordance with the standard PN-EN 1092-1.

It is possible to produce pumps with parameters different than those presented in the tables and on the graphs per agreement with the manufacturer.