

WPCC-100



DOWNLOAD



Catalog



2D



3D

SAVE TO PDF / PRINT

PUBLICATION - 2017-11-07

**NOMINAL OPERATION PARAMETERS AT
PURE WATER PUMPING
(for the maximum rotation speed and the
largest rotor)**

Capacity	Q _n	165	m ³ /h
Head	H	20,5	m
Rotational speed	n	960*	rpm
Impeller diameter	D _z	400*	mm
Shaft power	P _n	13,5	kW
Weight	m	848	kg
Max. permissible size of solids		28	mm
Smallest flow cross-section		40	mm

*Pump construction enables decreasing the operational parameters by reducing the rotation speed and/or reducing the rotor's diameter, adapting the pump to the system without choking the pump.

TYPICAL APPLICATIONS

- pumping mixtures of water and solids, with large grains and highly abrasive properties,
 - pumping mixtures of water and quartz sand, ores, coal, slag, ash,
 - mining - WPCC pumps intended to replace heavy duty pumps used so far for,
 - technological processes,
 - industrial systems,
 - filtration systems.
-


KEY ADVANTAGES

- long life ensured by the use of state-of-the-art corrosion and erosion resistant materials,
- possibility of operation with a frequency converter,
- possibility of serial operation,
- the pumped mixture density can reach $\rho_{\max} = 2200\text{kg/m}^3$ while pumping

mixtures with a 50% content of solids in water,

- silent and smooth operation
- connection dimensions in compliance with heavy duty pumps,
- inflow and suction operation,
- approved for operation in explosion-hazard zones - ATEX Ex I M2.


PUMP PERFORMANCE CURVE

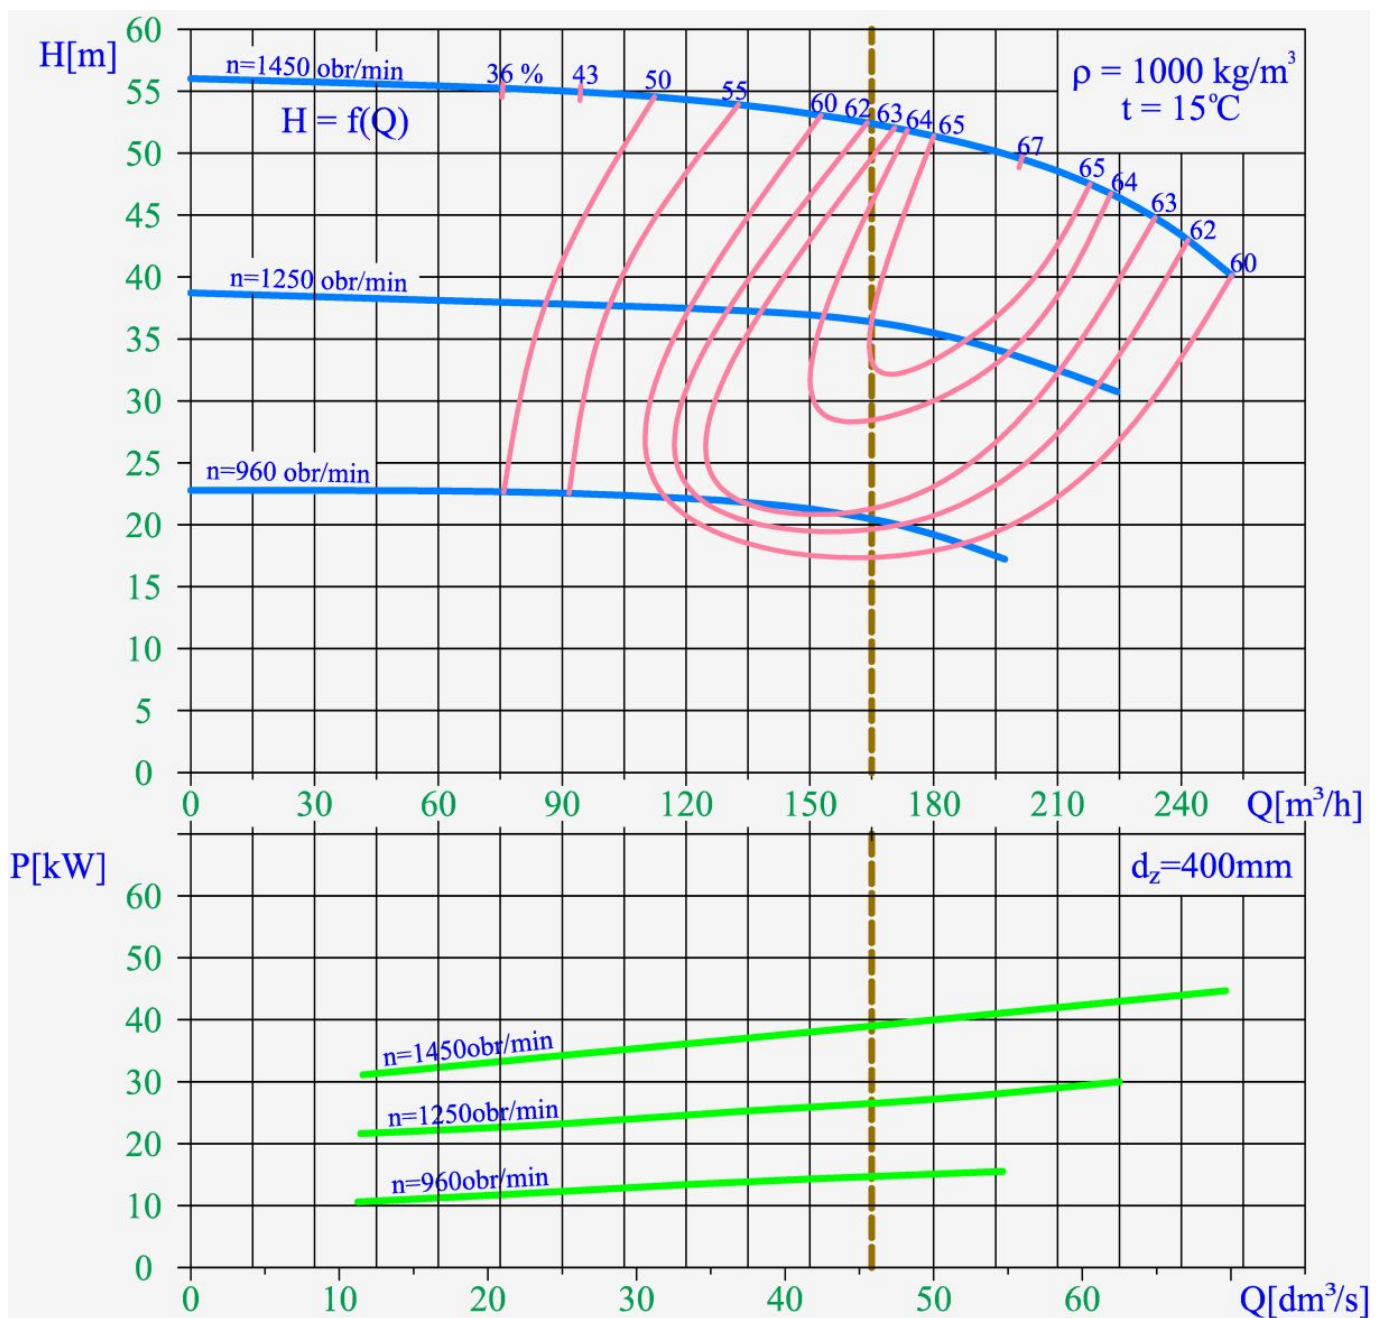


- $H = f(Q)$ - lift head acc. to rate flow,
- $P = f(Q)$ - power input acc. to rate flow,

- $\eta = f(Q)$ - efficiency acc. to rate of flow.

MAIN DIMENSIONS OF PUMP

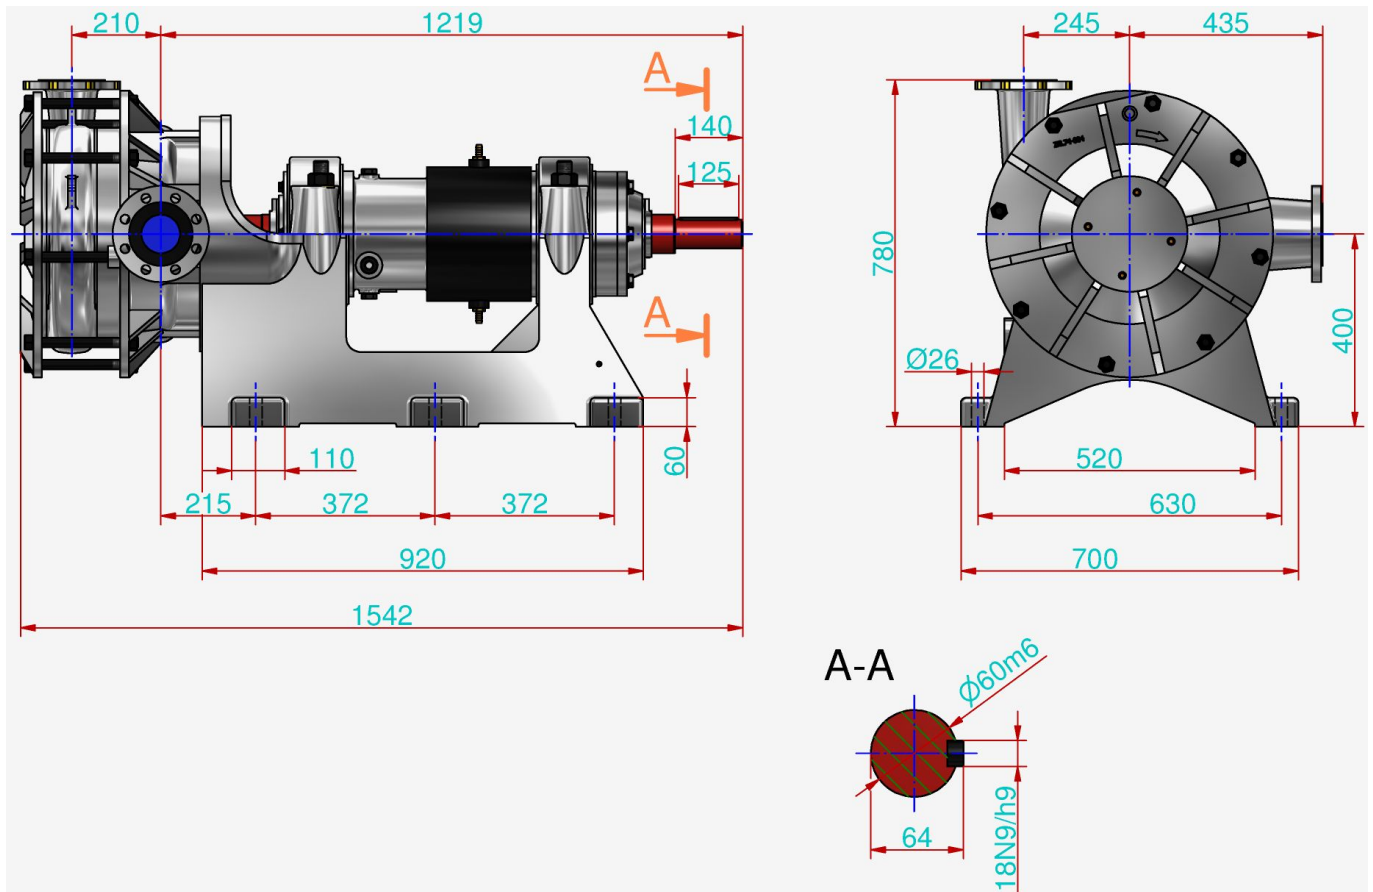


CONNECTION SIZES OF PUMP

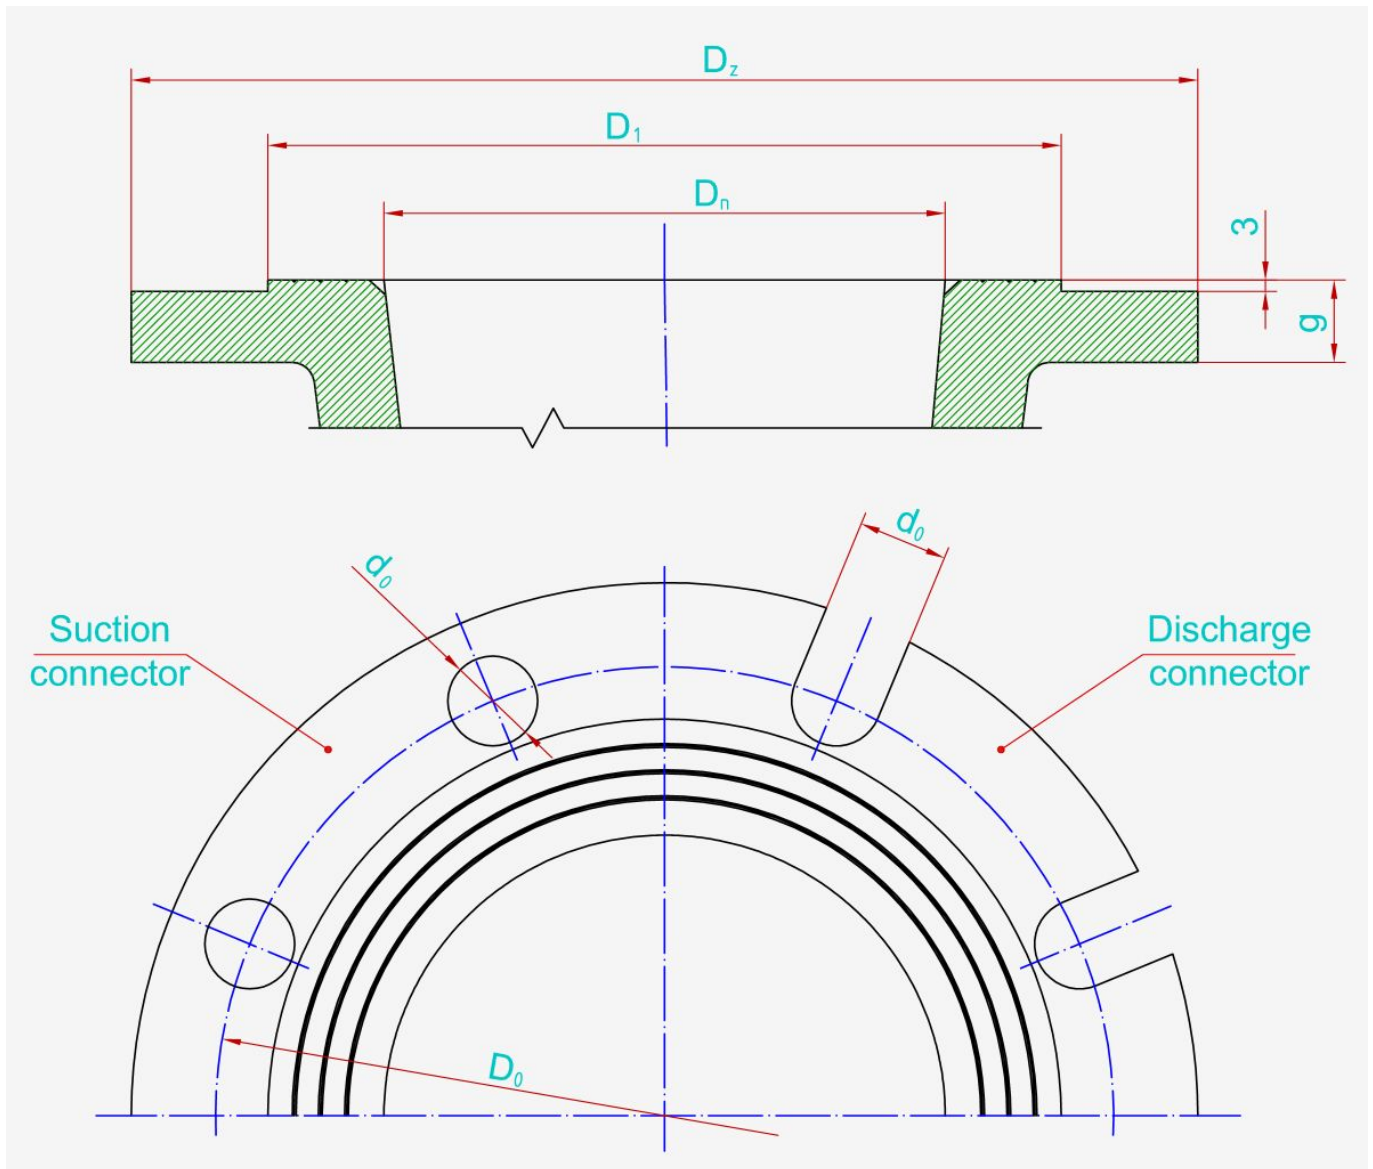

	D_n	i	D_z	d_0	g	D_0	D_1
Suction connector	150	8	285	22	26	240	211
Discharge connector	100	8	220	18	22	180	158
	mm	-	mm	mm	mm	mm	mm

The flanges are normally made in accordance with the standard PN-EN 1092-1 or PN-EN 1092-2.

MAIN DIMENSIONS OF PUMP UNIT

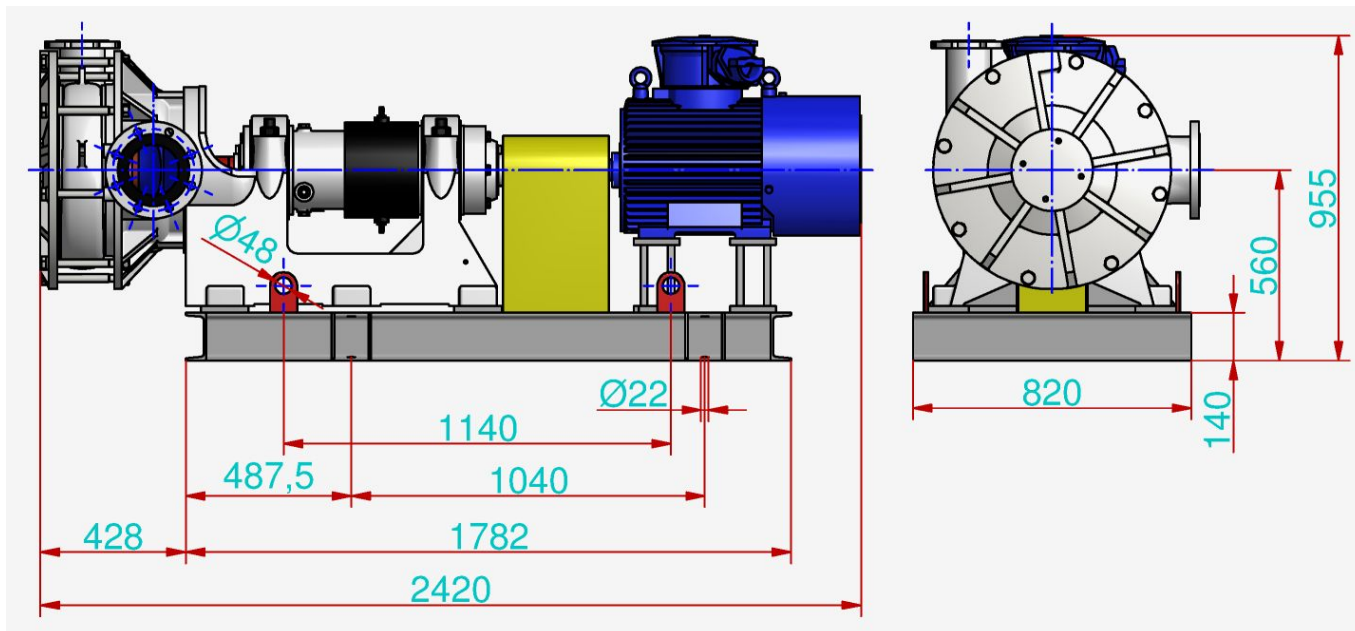

Motor type	Celma dSg200L6A	-
Coupling type	V150	-
Weight	1380	kg

It is possible to produce pumps with parameters different than those presented in the tables and on the graphs per agreement with the manufacturer.