

WPJ-200



DOWNLOAD



Catalog



2D



3D

SAVE TO PDF / PRINT

PUBLICATION - 2017-11-07

**NOMINAL OPERATION PARAMETERS AT
PURE WATER PUMPING
(for the maximum rotation speed and the
largest rotor)**

Capacity	Q _n	500	m ³ /h
Head	H	90	m
Rotational speed	n	1485*	rpm
Impeller diameter	D _z	526*	mm
Shaft power	P _n	190	kW
Weight	m	1030	kg
Max. permissible size of solids		56	mm
Smallest flow cross-section		80	mm

*Pump construction enables decreasing the operational parameters by reducing the rotation speed and/or reducing the rotor's diameter, adapting the pump to the system without choking the pump.

TYPICAL APPLICATIONS


- pumping mixtures of water and solids, with large grains and highly abrasive properties,
 - pumping mixtures of water and quartz sand, ores, coal, slag, ash,
 - mining - WPJ pumps intended to replace hydrotransport drainage pumps used so far,
 - water supply systems,
 - pressure boosting,
 - technological processes,
 - industrial systems,
 - filtration systems.
-

KEY ADVANTAGES

- long life ensured by the use of state-of-the-art corrosion and erosion resistant materials,
- possibility of operation with a frequency converter,
- possibility of serial operation,


- the pumped mixture density can reach $\rho_{\max} = 1700\text{kg/m}^3$ while pumping mixtures with a 50% content of solids in water,
- silent and smooth operation,
- connection dimensions in compliance with hydrotransport pumps,
- inflow and suction operation,
- approved for operation in explosion-hazard zones - ATEX Ex I M2.

PUMP PERFORMANCE CURVE

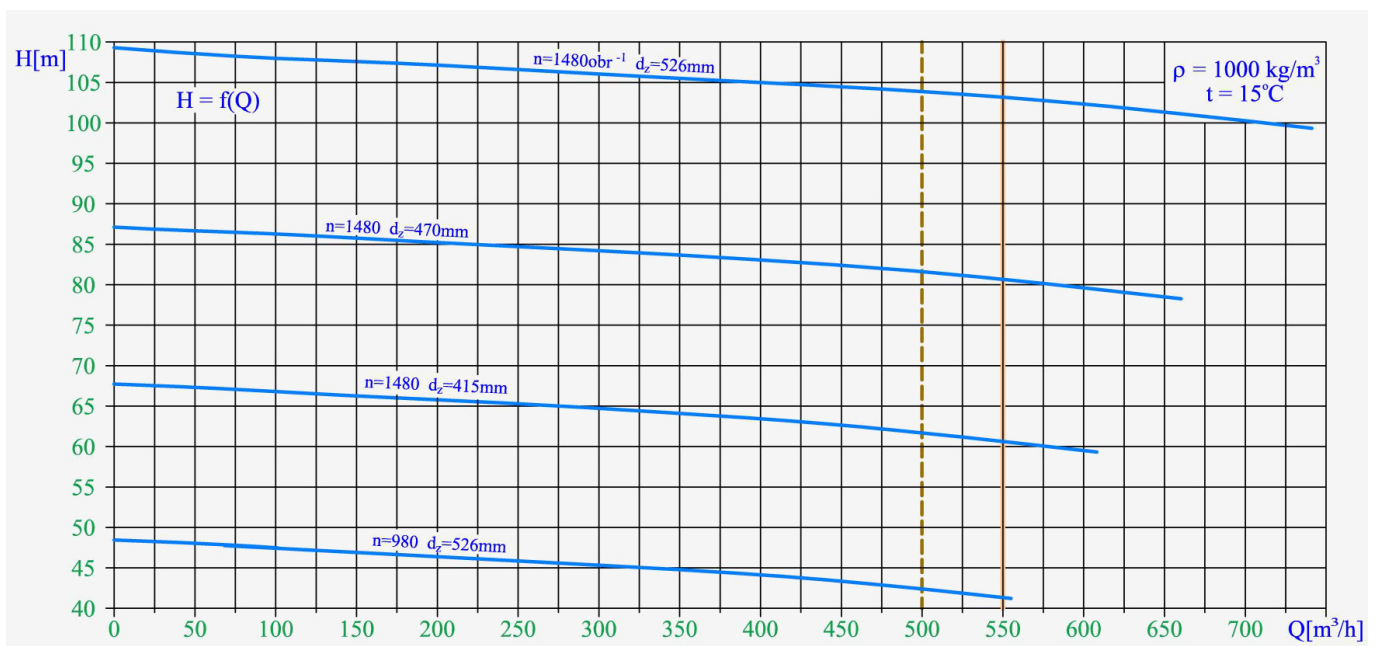


- $H = f(Q)$ - lift head acc. to rate flow,
- d_z - impeller diameter,
- n - rotational speed.

MAIN DIMENSIONS OF PUMP

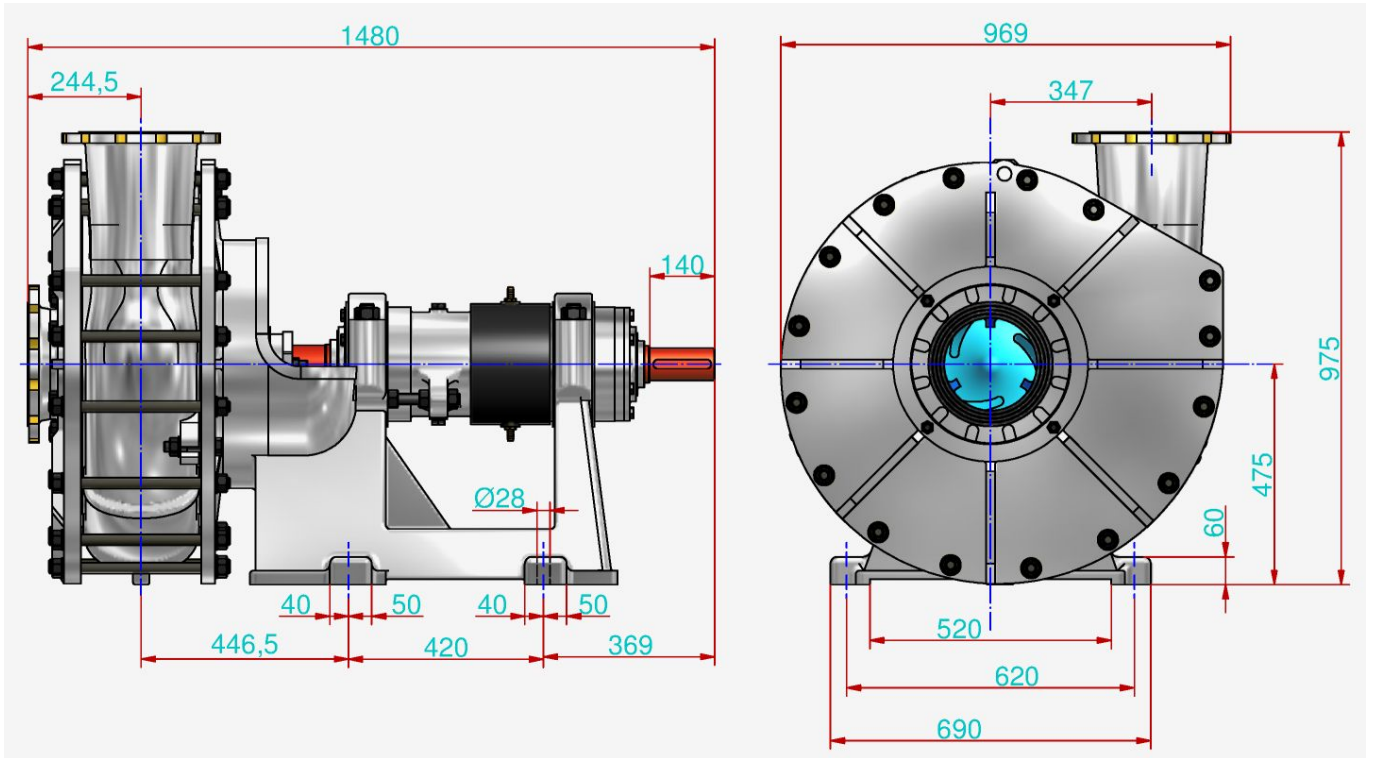


CONNECTION SIZES OF PUMP

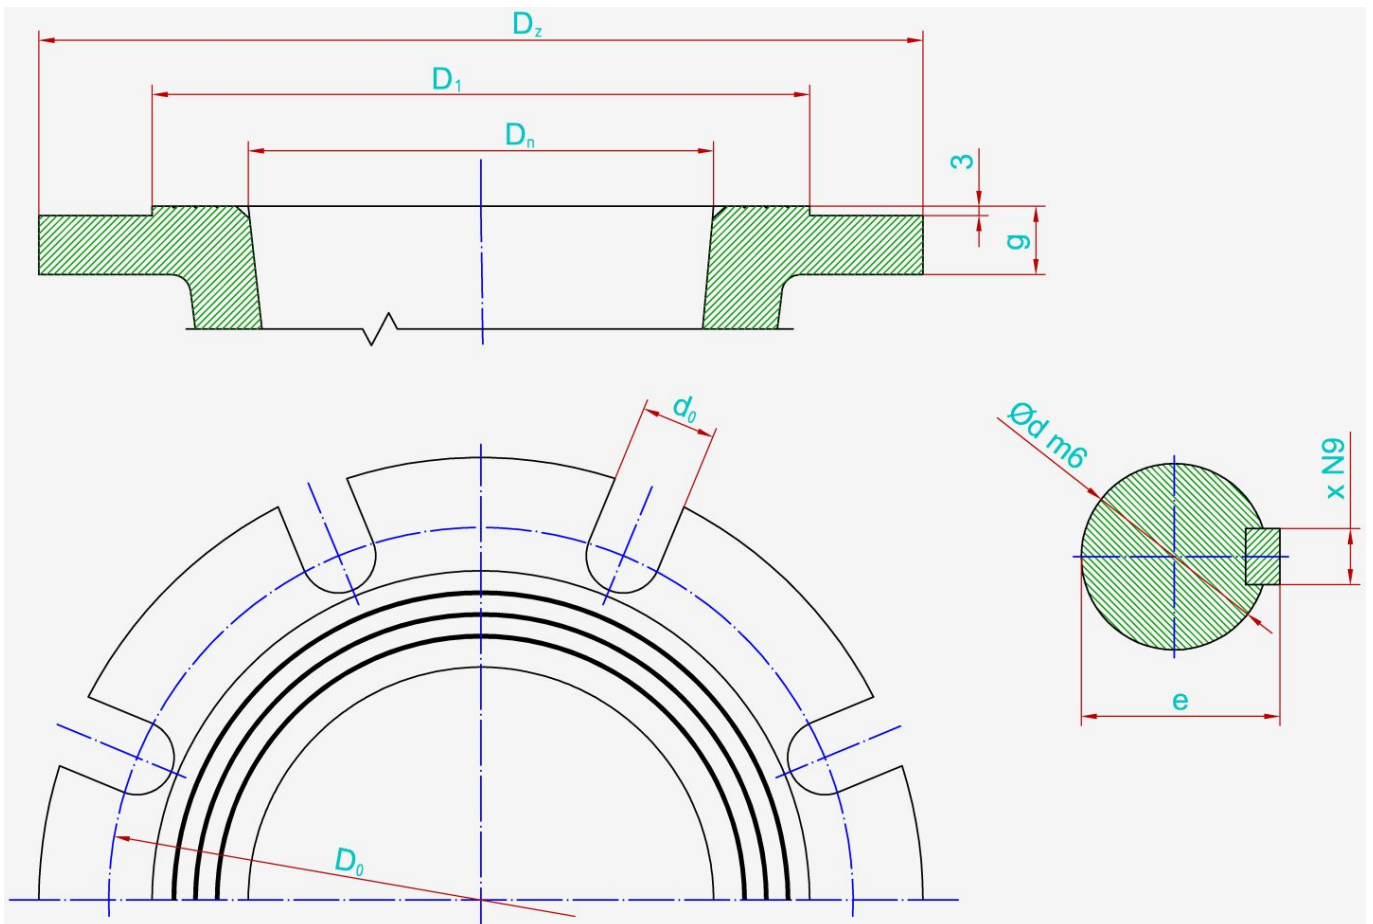

	P _n	D _n	i	D _z	d ₀	g	D ₀	D ₁	d	e	x
Suction connector	16	200	12	340	26	24	295	268	-	-	-
Discharge connector A	16	200	12	340	26	24	295	268	-	-	-
Discharge connector B	25	200	12	360	26	30	310	278	-	-	-
Shaft / coupling	-	-	-	-	-	-	-	-	70	74,5	20
	bar	mm	-	mm	mm	mm	mm	mm	mm	mm	mm

The flanges are normally made in accordance with the standard PN-EN 1092-1 or PN-EN 1092-2.

MAIN DIMENSIONS OF PUMP UNIT

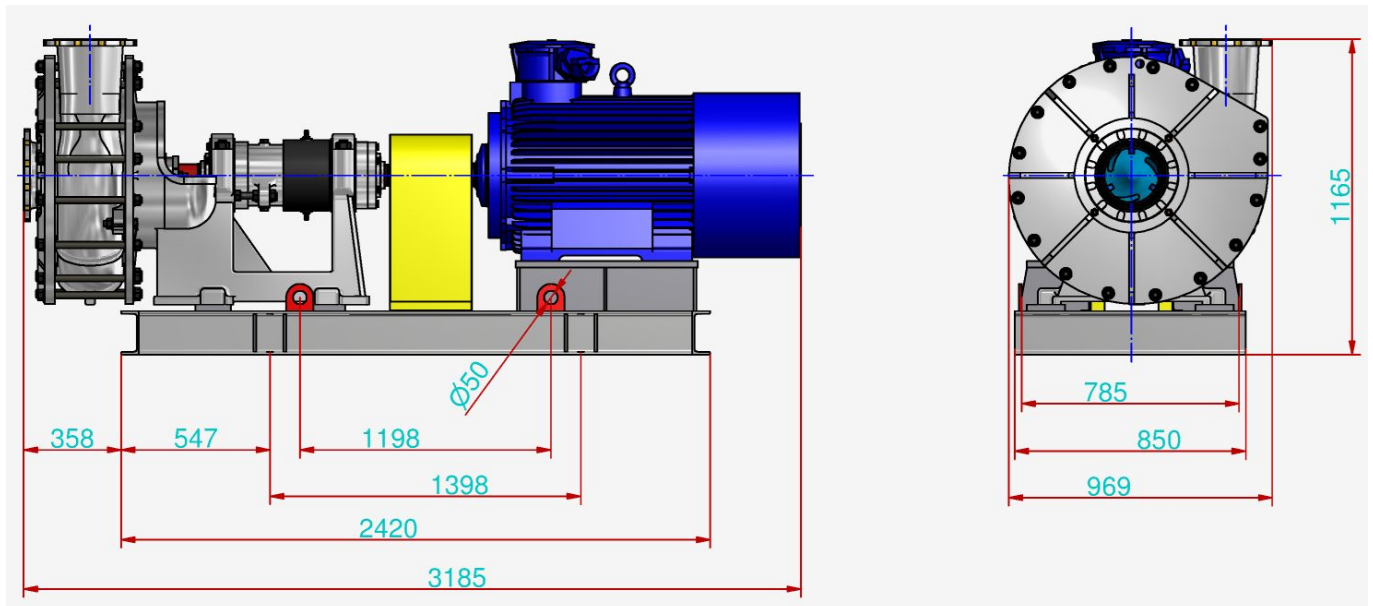

Motor type	Celma STRG355M4	-
Coupling type	V365	-
Weight	3645	kg

It is possible to produce pumps with parameters different than those presented in the tables and on the graphs per agreement with the manufacturer.

