

# WPJ-200



**DOWNLOAD**



Catalog



2D



3D

---

**SAVE TO PDF / PRINT**

---

**PUBLICATION - 2017-11-07**

**NOMINAL OPERATION PARAMETERS AT  
PURE WATER PUMPING  
(for the maximum rotation speed and the  
largest rotor)**

Capacity	$Q_n$	500	m <sup>3</sup> /h
Head	H	90	m
Rotational speed	n	1485*	rpm
Impeller diameter	$D_z$	526*	mm
Shaft power	$P_n$	190	kW
Weight	m	1030	kg
Max. permissible size of solids		56	mm
Smallest flow cross-section		80	mm

\*Pump construction enables decreasing the operational parameters by reducing the rotation speed and/or reducing the rotor's diameter, adapting the pump to the system without choking the pump.

---

## TYPICAL APPLICATIONS


- pumping mixtures of water and solids, with large grains and highly abrasive properties,
  - pumping mixtures of water and quartz sand, ores, coal, slag, ash,
  - mining – WPJ pumps intended to replace hydrotransport drainage pumps used so far,
  - water supply systems,
  - pressure boosting,
  - technological processes,
  - industrial systems,
  - filtration systems.
- 

## KEY ADVANTAGES

- long life ensured by the use of state-of-the-art corrosion and erosion resistant materials,
- possibility of operation with a frequency converter,
- possibility of serial operation,


- the pumped mixture density can reach  $\rho_{\max} = 1700\text{kg/m}^3$  while pumping mixtures with a 50% content of solids in water,
- silent and smooth operation,
- connection dimensions in compliance with hydrotransport pumps,
- inflow and suction operation,
- approved for operation in explosion-hazard zones – ATEX Ex I M2.

## PUMP PERFORMANCE CURVE

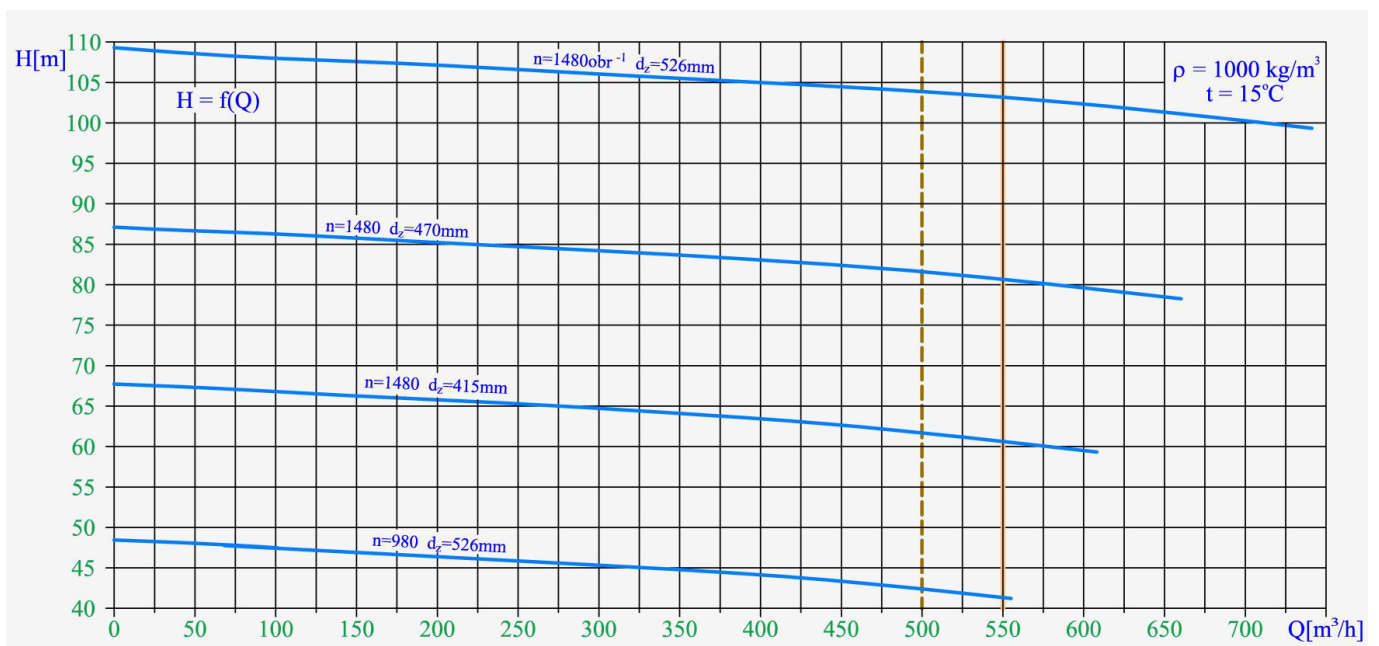


- $H = f(Q)$  – lift head acc. to rate flow,
- $d_z$  – impeller diameter,
- $n$  – rotational speed.

## MAIN DIMENSIONS OF PUMP

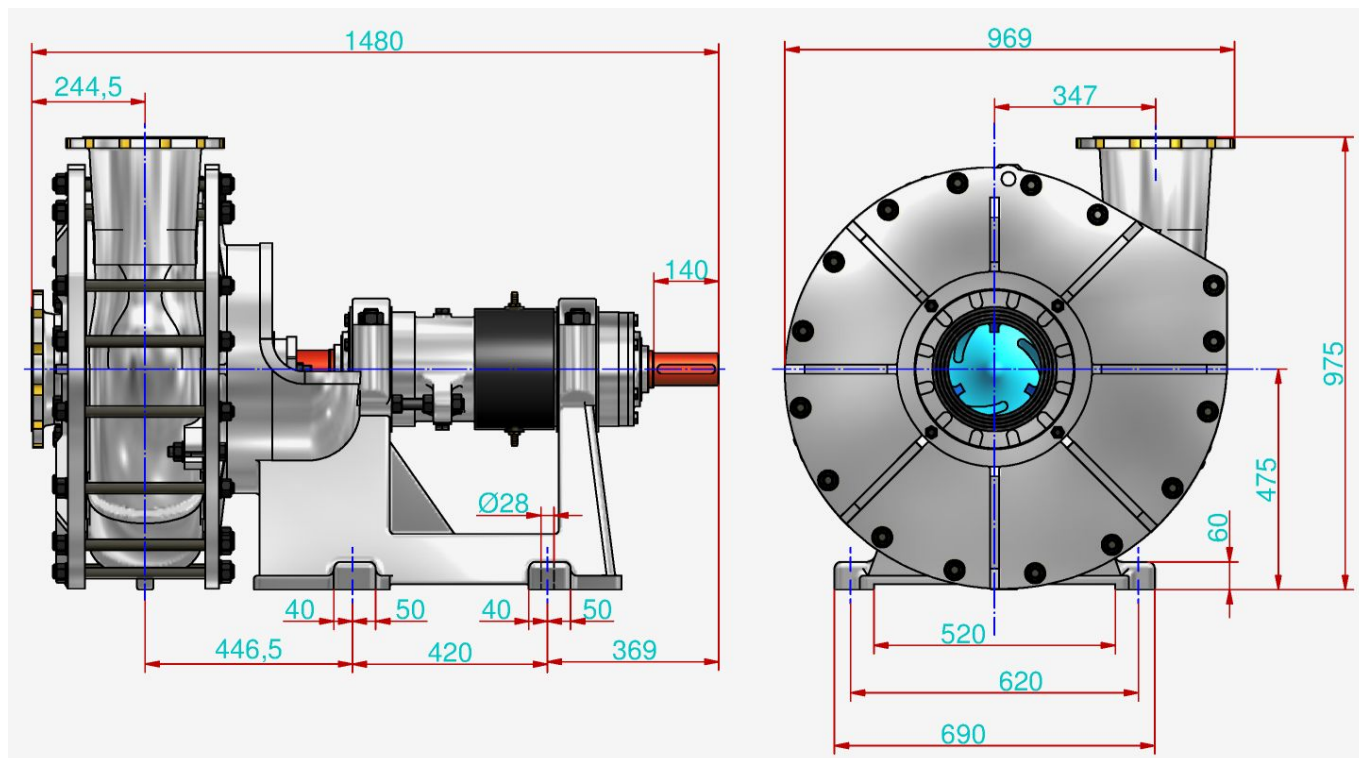


## CONNECTION SIZES OF PUMP

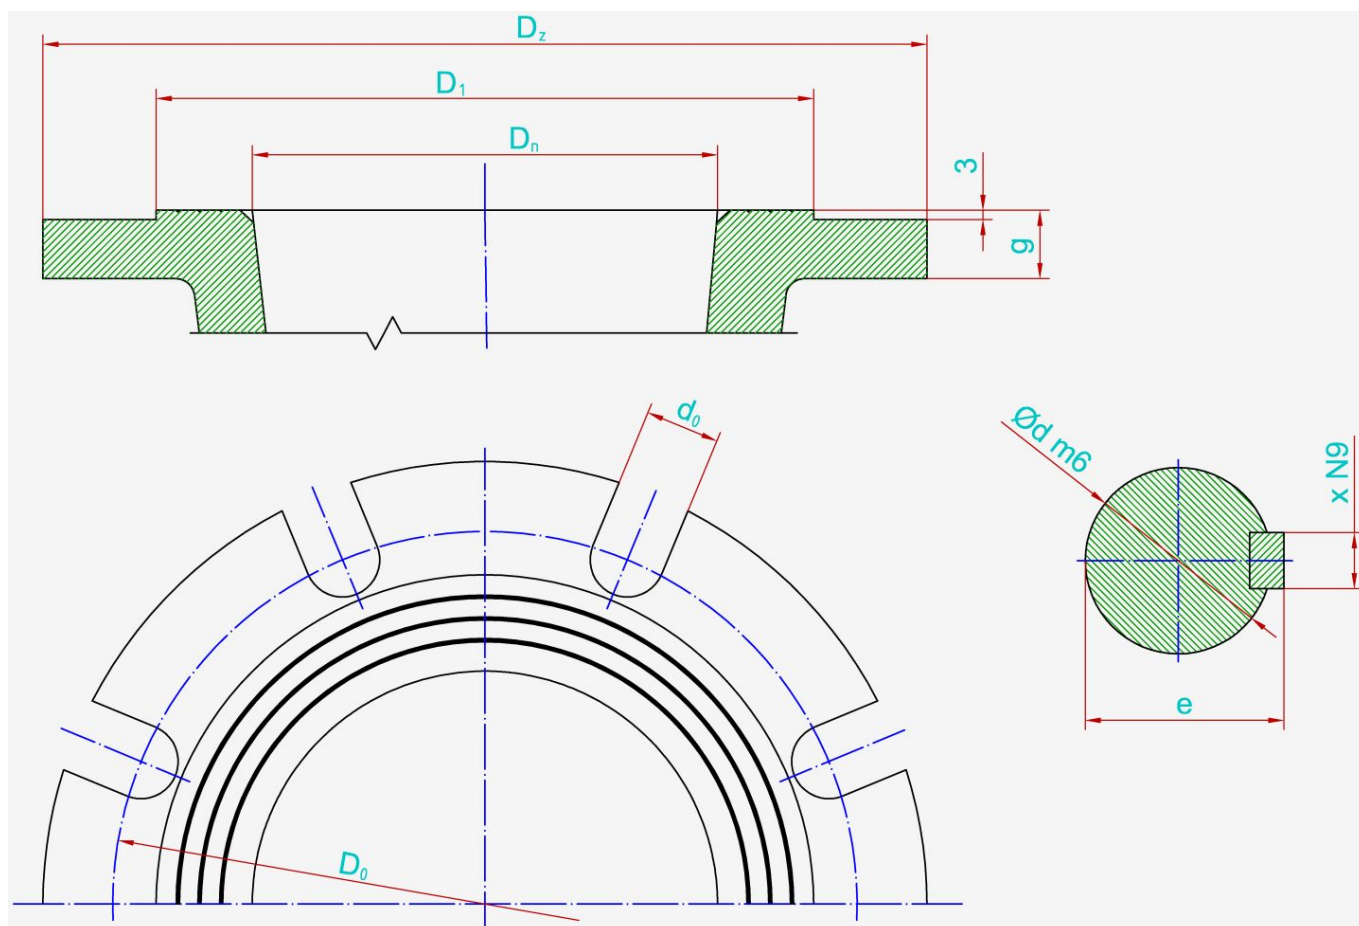

	P <sub>n</sub>	D <sub>n</sub>	i	D <sub>z</sub>	d <sub>0</sub>	g	D <sub>0</sub>	D <sub>1</sub>	d	e	x
Suction connector	16	200	12	340	26	24	295	268	-	-	-
Discharge connector A	16	200	12	340	26	24	295	268	-	-	-
Discharge connector B	25	200	12	360	26	30	310	278	-	-	-
Shaft / coupling	-	-	-	-	-	-	-	-	70	74,5	20
	bar	mm	-	mm	mm	mm	mm	mm	mm	mm	mm

The flanges are normally made in accordance with the standard PN-EN 1092-1 or PN-EN 1092-2.

## MAIN DIMENSIONS OF PUMP UNIT

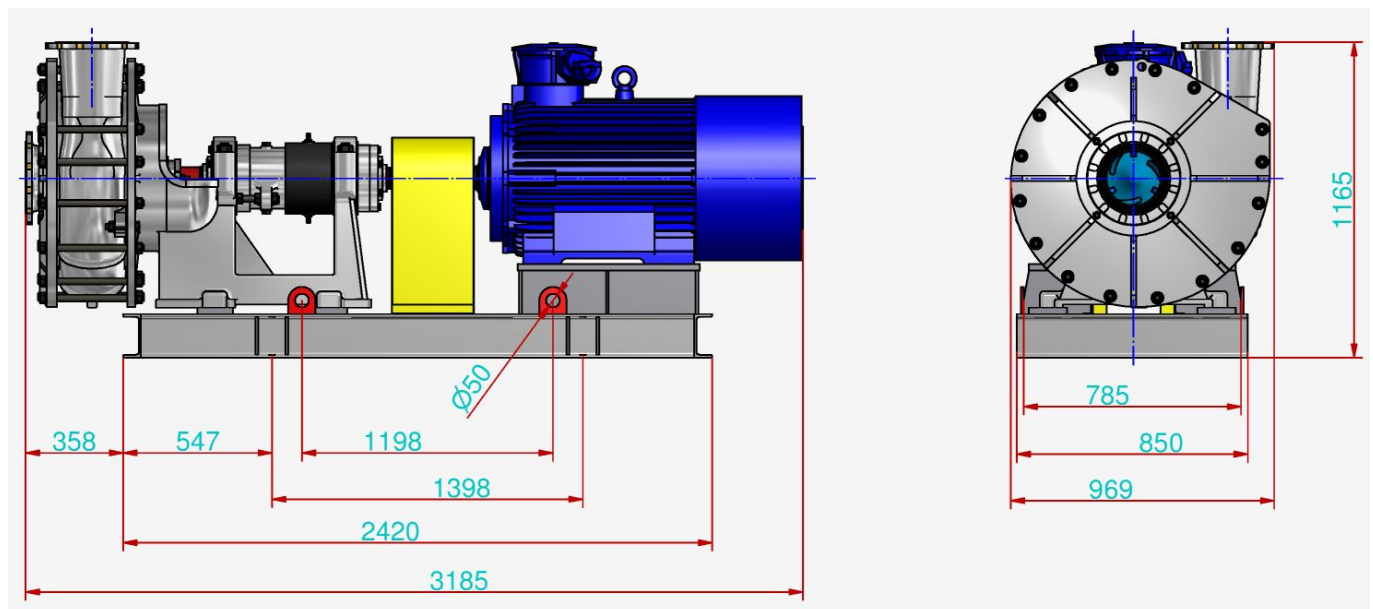

Motor type	Celma STRG355M4	-
Coupling type	V365	-
Weight	3645	kg

**It is possible to produce pumps with parameters different than those presented in the tables and on the graphs per agreement with the manufacturer.**

