


WPS-100A



DOWNLOAD

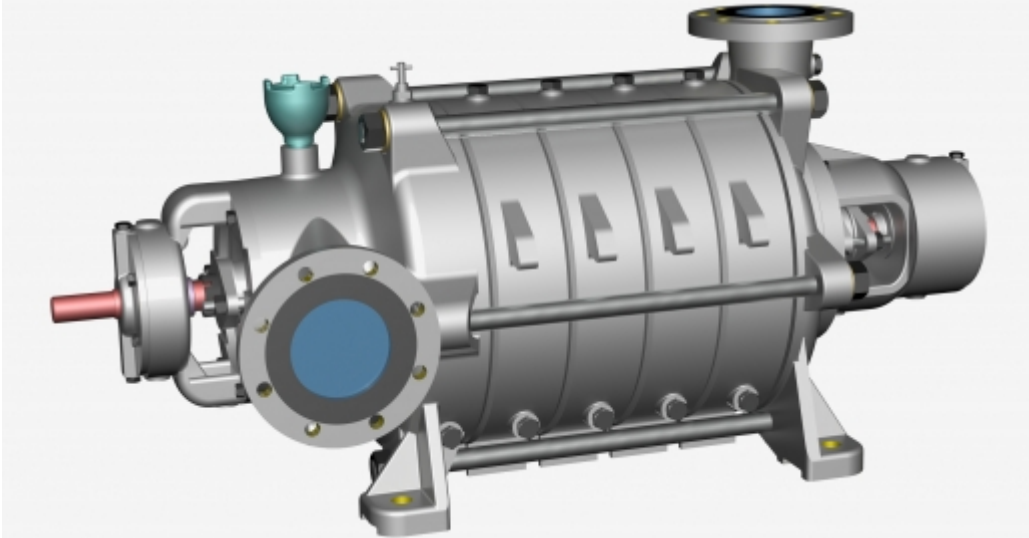

Catalog



2D



3D

SAVE TO PDF / PRINT

PUBLICATION - 2017-11-07

TYPICAL APPLICATIONS


- pumping of pure or mechanically contaminated water with solids with the grain size of up to 2 mm,

- mining – longwall and auxiliary dewatering – WPS pumps intended to replace existing medium pressure drainage pumps,
 - water supply systems,
 - pressure boosting,
 - technological processes,
 - industrial systems,
 - filtration systems.
-

KEY ADVANTAGES

- long life ensured by the use of state-of-the-art corrosion-and erosion resistant materials,
 - special material execution DUPLEX especially resistant to difficult conditions,
 - no water cooling of bearings required due to the appropriate design of the relief of the pump axial forces,
 - silent and smooth operation,
 - connection dimensions in compliance with medium pressure drainage pumps,
 - inflow and suction operation,
 - compact and modern design,
 - maintenance-free operation with the use of mechanical sealing,
 - approved for operation in explosion-hazard zones – ATEX Ex I M2.
-


PUMP PERFORMANCE CURVE

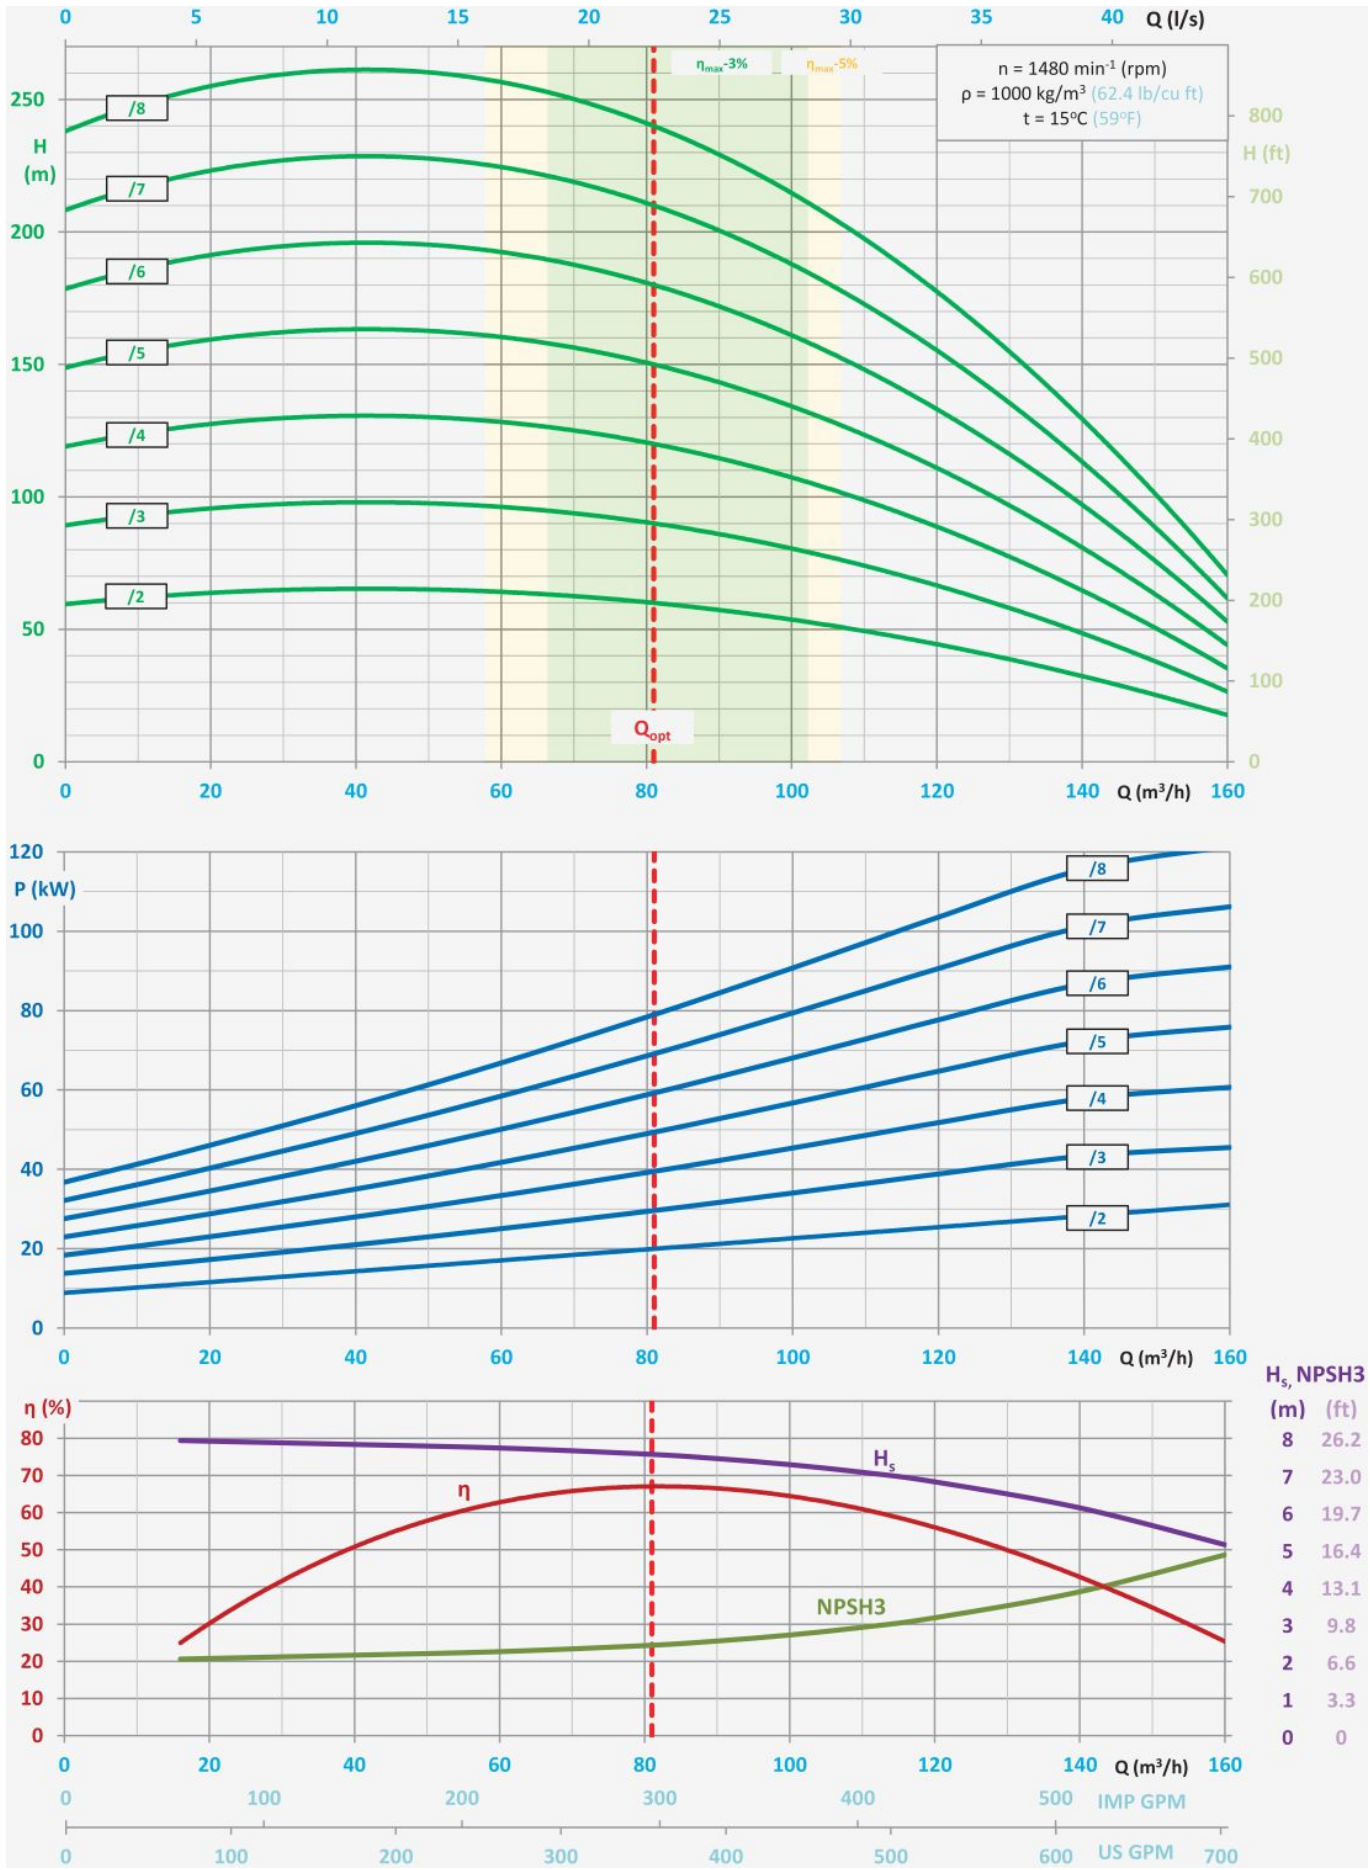

▪ $H = f(Q)$ - lift head acc. to rate flow,


- $P = f(Q)$ - power input acc. to rate flow,
- $\eta = f(Q)$ - efficiency acc. to rate of flow,
- $H_s = f(Q)$ - allowable suction head acc. to rate of flow,
- $NPSH_3 = f(Q)$ - net positive suction head and rate of flow.

MAIN DIMENSIONS OF PUMP

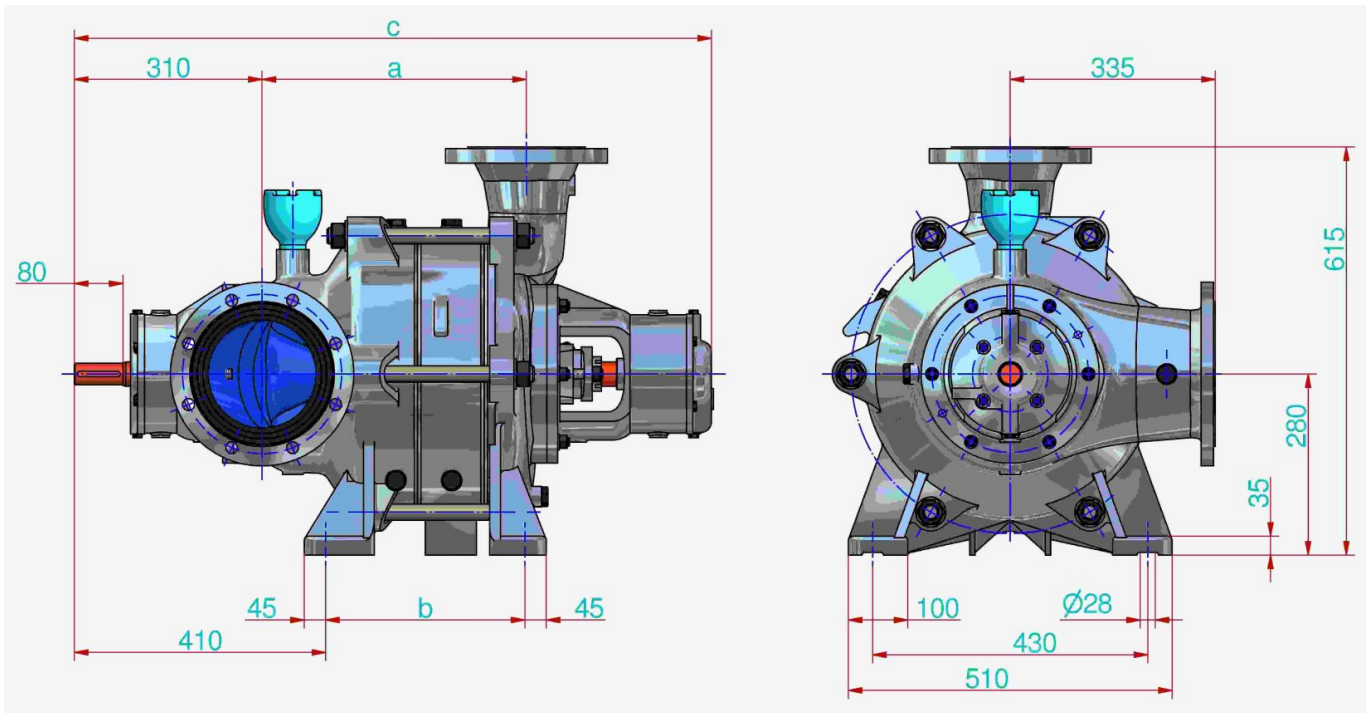

	Number of stages								
	2	3	4	5	6	7	8		
a	291,5	398,5	505,5	612,5	719,5	826,5	933,5	mm	
b	190	297	404	511	618	725	832	mm	
c	944	1051	1158	1265	1372	1479	1586	mm	


CONNECTION SIZES OF PUMP

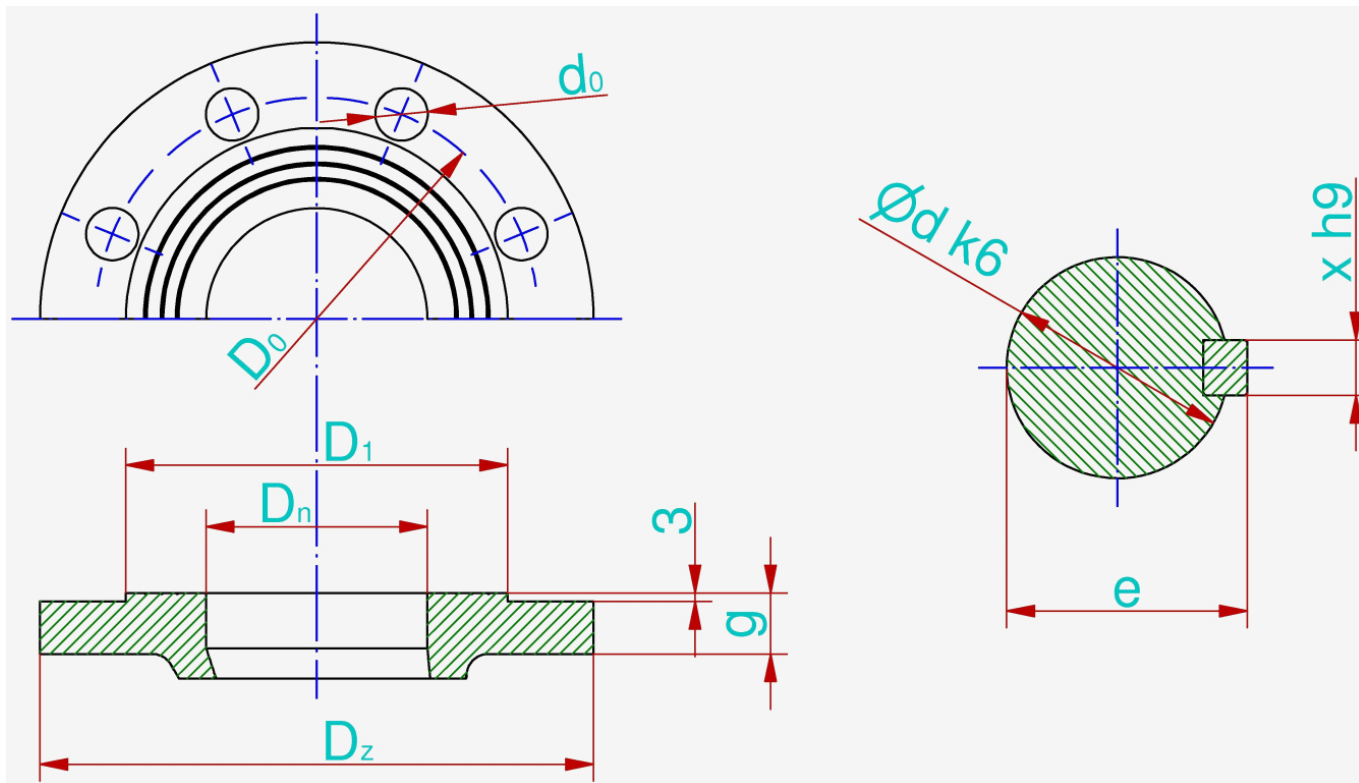

	D_n	Number of stages	P_n	D_f	d_0	g	D_0	D_1	i	d	e	x
Suction connector	125	-	10	250	19	24	210	188	8	-	-	-
Discharge connector	100	2÷6	25	235	23	26	190	162	8	-	-	-
		5÷8	40	235	22	24	190	162	8	-	-	-
Shaft / coupling	-	-	-	-	-	-	-	-	-	35	38	10
	mm	-	bar	mm	mm	mm	mm	mm	-	mm	mm	mm

The flanges are normally made in accordance with the standard PN-EN 1092-1 or PN-EN 1092-2.

MAIN DIMENSIONS OF PUMP UNIT

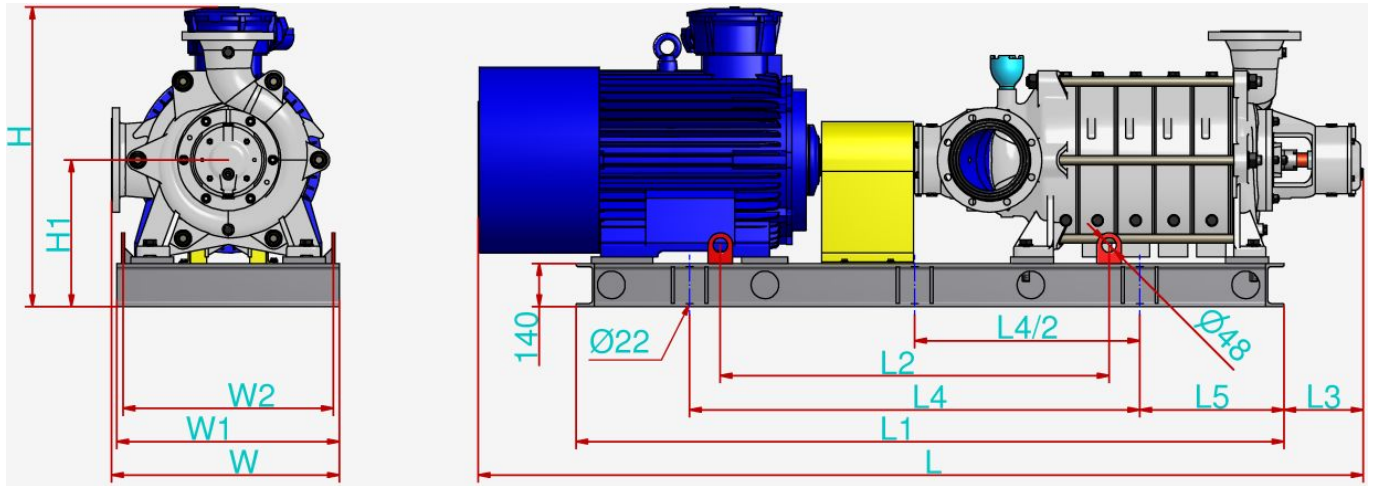

	Number of stages								
	2	3	4	5	6	7	8		
L	1810	1965	2075	2240	2500	2605	2710	mm	
L₁	1355	1500	1620	1785	1970	2080	2185	mm	
L₂	715	805	870	955	1060	1115	1170	mm	
L₃				244				mm	
L₄	910	1005	1065	1150	1260	1310	1365	mm	
L₅	195	250	305	355	410	465	515	mm	
W	645	645	670	670	670	670	670	mm	
W₁	620	620	620	620	670	670	670	mm	
W₂	570	570	570	570	620	620	620	mm	
H	820	840	840	860	910	910	910	mm	
H₁	420	420	420	420	420	420	420	mm	
Weight	745	875	995	1155	1425	1505	1585	kg	
Coupling type (Rex Viva)	V150	V150	V170	V190	V215	V215	V215	-	
Motor type (Celma)	dSg 200L4-EP	dSg 225S4-EP	dSg 225M4-EP	dSg 250M4-EP	dSg 280M4-EP	dSg 280M4-EP	dSg 280M4-EP	-	
Motor power	30	37	45	55	75	90	90	kW	
Motor weight	315	365	405	485	660	700	700	kg	

It is possible to produce pumps with parameters different than those presented in the tables and on the graphs per agreement with the manufacturer.